


INSTRUCTION MANUAL

TABLE LANTERN SLOANE

5818924

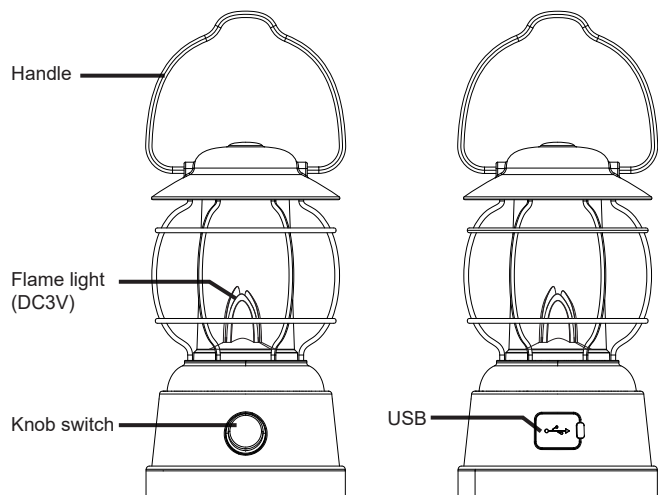


Rated power(W)	: 3.2W
Rated voltage(V)	: Dedicated for DC3V Flame light
Dimming range(W)	: 10%~100%(0.4W~3.5W)
Color temp(K)	: 2200K
Color Rendering Index(Ra)	: Ra≥80
USB output/charging input	: 5V/1A
Battery type	: Lithium battery
Battery capacity(mAh)	: 3.7V 5200mAh
Charging time(H)	: ≥7hours
Working temp(°C)	: Charging 0°C~45°C Discharging -10°C~50°C
Storage temperature(°C)	: -20°C~60°C
Working humidity(%)	: ≤95%
Storage condition	: Dry ventilated place
Whole light weight(g)	: 550g(Include battery)
Size	: 126*223mm
Light body materials	: Plastic + Iron + Bamboo
IP rating(IP)	: IP44

Knob switch

- Long press Knob 1s to turn on lamp, Default mode Lowest lumen. Turn knob clockwise and counter clockwise for dimming.
- Short press knob for second mode- Flame mode lowest lumen. Turn knob clockwise and counter clockwise for dimming.
- Short press knob for third mode-breathing light lowest lumen. Turn knob clockwise and counter clockwise for dimming.
- For dimming, It takes 3-4 circles of knob turning from lowest lumen to highest lumen.

Note: Long press knob for switch on/off lamp, short press for mode switching.
The lamp will be turned off automatically if the voltage of battery is lower than 3V, which means it needed to recharge. Please turn off the light while recharging.

USB As the below picture shown, open the rubber cover:



DC 5V adaptor (not included)
 Do not use unmatched adaptor

The green indicator flickers means power charging, green light going on means full with power.
 When the USB output interface is used for external equipment charging, the red indicator going on and the indicator flicker means power off.

Notice: USB output interface is not available during charging.

Notes:

1. Only for DC+5V adaptor.
2. Do not be directly exposed to rain water.
3. To prevent it from battery damage as overfall, please charge timely when power off.
4. Please charge once per three months if not use for quite some time.
5. To prevent it from water and dust contaminant, please cover the USB output interface with waterproof film when it not in use.
6. In order to avoid accidents, please do not put it into fire.
7. Please store in a dry and ventilated place.

